





4ALB-60CC

4ALB-120CC

SPECIFICATIONS



Salt Water Holding Cage



4" ALUMINUM BULLET™ WITH 5' OR 10' CABLE AND CABLE CLAMPS

356 ALUMINUM ALLOY T6 HEAT TREATED

4ALB-60CC

4ALB-120CC


ULTIMATE PULLOUT CAPACITY - 3,500 LBS.

- Aircraft-quality cast aluminum 356 Alloy - No Corrosion
- Weighs .74lb (.34) / 1.2lb (.54 kg)
- 3,150lb ultimate load capacity at 2.5 ft installation depth
- Great for soft to hard compact and rocky soil
- Custom lengths and stainless steel cable available



Load Capacity

Pullout strength at minimum depth of 2.5' (.8 m)



Soil Class 1 Hardpan or Asphalt	3,500lb 15.6 kN
Soil Class 2 Sandy gravel Very dense sand	2,200lb 9.79 kN
Soil Class 3 Silty/clayey sand Silty gravel	1,900lb 8.45 kN
Soil Class 4A Loose/med dense sands Loose sands Firm clays	900lb 4.00 kN
Soil Class 4B Loose fine un-compacted sand	475lb 2.11 kN

GALVANIZED STEEL AIRCRAFT CABLE

Diameter: 3/16" (4.8 mm)
Length: 5' (1.5 m) or 10' (3 m)



Breaking Strength 4,200lb (18.7kN)

Available in stainless steel as a special order

CABLE CLAMPS

Galvanized Steel



Use all three clamps for maximum loop strength (approx. 90% of cable breaking strength)



QUICK REFERENCE


4ALB-60CC

4ALB-120CC

SPECIFICATIONS



Drive rod - 3/4" diameter round smooth solid steel 4 feet long

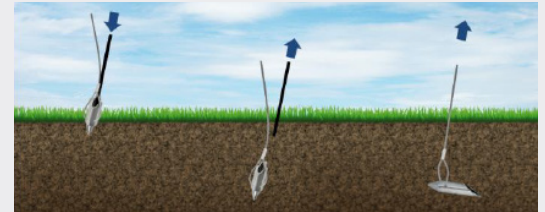

1) Drive - Anchor to minimum depth of 3.5' (1 m) 2) Remove - the drive rod 3) Pull - the cable to turn (lock) the anchor

INTO THE GROUND

4' Drive Rod Diameter; 3/4" (19.05mm)

No re-bar. It will jam in the anchor



Drive Rod Head When using a sledge hammer DR-4ST




Safety Holding Handle DR-SHH



Sledge Hammer



Demolition Hammer or Small Jackhammer depending on soil conditions




LOCKING THE ANCHOR



During locking, anchor will pull back up as it turns, settles, and locks. Depending on soil type, this can typically be 2-8 inches (5-20 cm).

Leverage (Manual)

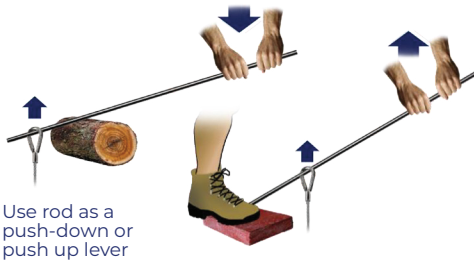

Use rod as a push-down or push up lever

Leverage (Mechanical)




Ratchet-lever hoist ("come-along")

Pull to "Lock"



SPACING

For best holding strength, anchors should be installed at a minimum spacing equal to the depth of the anchor, in order to avoid each other's "cone of soil" — the region of soil that contributes to an anchor's holding strength.

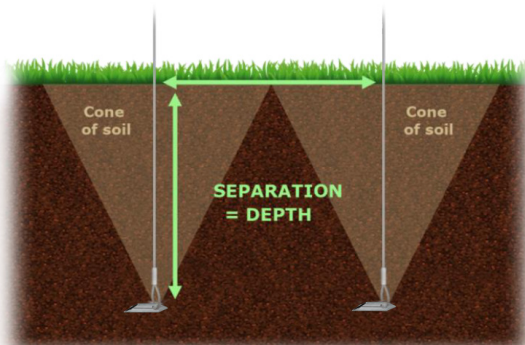

NON-VERTICAL LOAD

Install at same angle as load for maximum pullout strength

